



Walking tractor chains

Ketten für den Einachstraktor

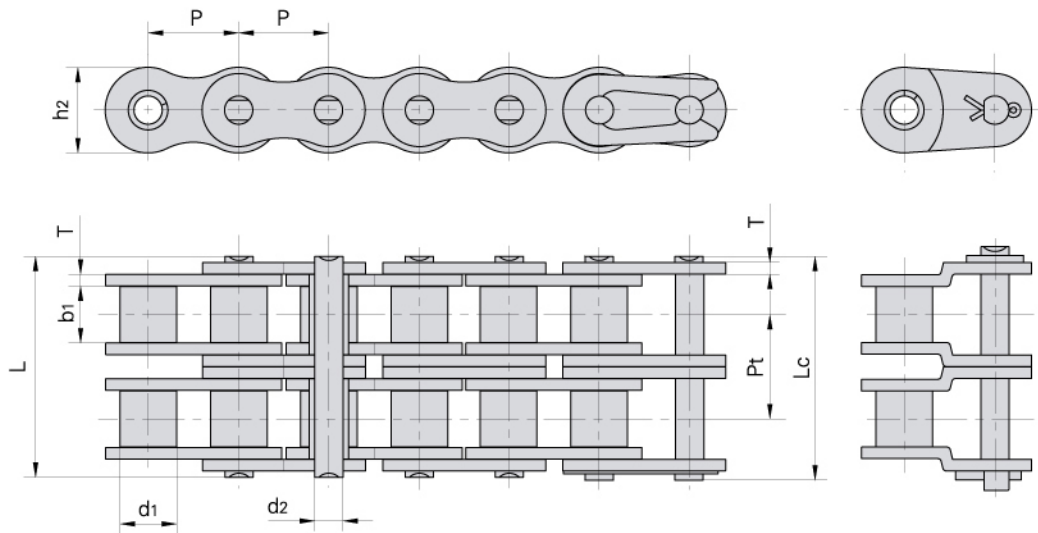

DIN/ISO Chain No. Teilung DIN/ISO Ketten Nr.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
	<i>P</i>	<i>d1</i>	<i>b1</i>	<i>d2</i>	<i>L</i>	<i>Lc</i>	<i>h2</i>	<i>T</i>	<i>Pt</i>	<i>Q min</i>	<i>Q0</i>	<i>q</i>
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
08B-2	12.70	8.51	7.75	4.45	31.2	32.2	11.8	1.60	13.92	32.0/7273	38.7	1.34
12A-2	19.05	11.91	12.57	5.94	48.8	50.5	18.0	2.42	22.78	63.6/14455	82.1	2.92
12AH-2	19.05	11.91	12.57	5.94	55.3	57.1	18.0	3.25	26.11	63.6/14455	84.5	3.71

Recommend 12AH-2 used for rotary tillage chain!
 12AH-2 verstärkte Ketten empfehlen sich zur Anwendung in den Rotavatoren.
 12AH-2 heavy duty chain suit for any solid soil!
 12AH-2 verstärkte Ketten sind geeignet für rotierende Bearbeitung aller Massivbodenarten.



Partial photograph of rotary tillage chain
 Detailsicht der Rotavatorketten